


# STS Siloxane Monitor Application

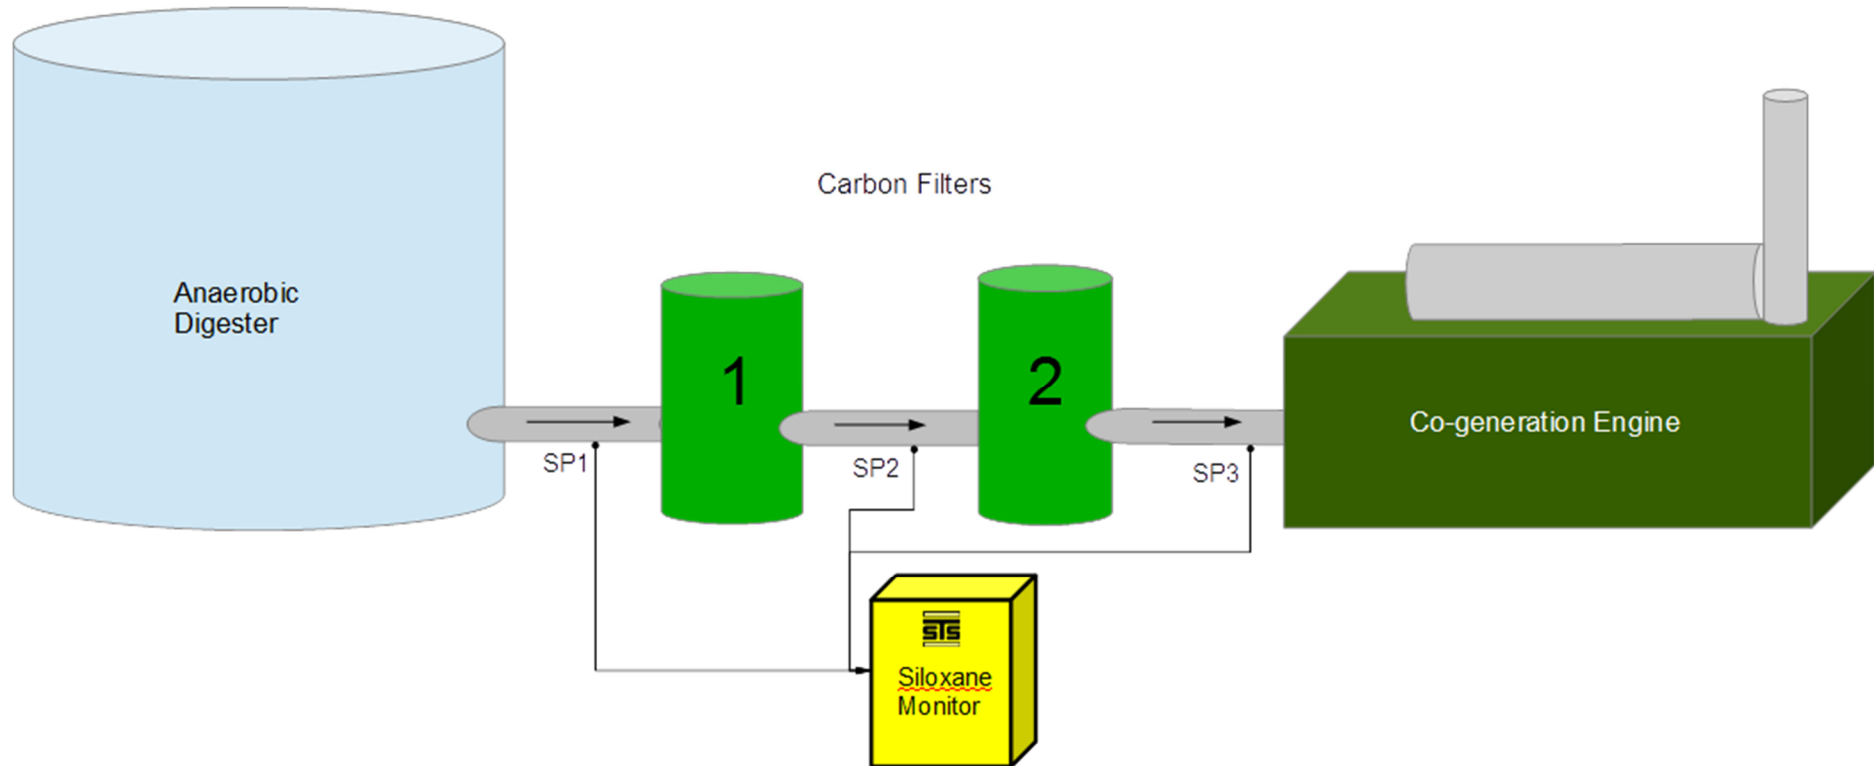

The STS Siloxane Monitor can sample from up to 3 points between the incoming gas stream and the engine. In typical application, these would be before the Activated Carbon filter (eg unfiltered gas), between a pair of filters where they operate a “primary and secondary” system and after the final filter (eg clean gas). The Monitor can therefore be used to trend filter use and predict filter failure and optimise filter change regimes.